



## TXON GRP FIBRE-BOARDS


Thickness (mm)	Thermal conductivity (W/m.K)	R-Value (per inch)
9.4 – 47.2	0.033	4.4

TXON GRP® is excited to list our latest product line of strand mat fibre board. Initial testing of TXON GRP® fibre boards indicate significant fire retardation and thermal isolation/insulation properties.

Some uses of TXON GRP® fibre board is:

- Insulation applications – buildings, home, automotive etc.
- Earth touching applications – moisture rich environments
- Enhancement of fire protection
- Sound proofing

TXON GRP® fibre board is 100% recyclable, non-conductive, inert, hypo-allergenic, and non-moisture wicking.

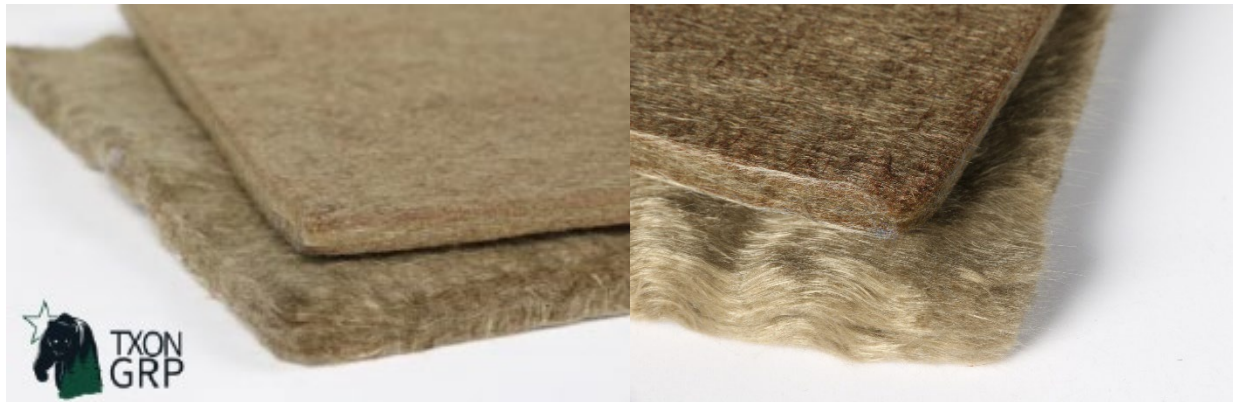

**LIGHTER. TOUGHER. BETTER. GREEN.**

1575 Lauzon Road Windsor, Ontario N8S 3N4  
844 TXONGRP [www.txongrp.com](http://www.txongrp.com)